

## ES24-CLA Series Specifications

EcoSlim light box with attached Luminous SkyTile sits on, and is clipped to, Classic Elevator

ES24-CLA - 23.75" x 47.75" x 5" deep nominal (includes Elevator & SkyTile)

ES24M-CLA - 59.14cm x 119.14cm x 12.7cm deep metric (includes Elevator & SkyTile)

ES24G-CLA - 61.64cm x 124.14cm x 12.7cm deep German Metric (includes Elevator & SkyTile)

### 1 Lighting (EcoSlim LED edge lit light box):

Color temperature: 6500K

Strict LED binning standards assure consistent & high quality illumination

State of the art edgelit technologies provide uniform illumination for the Luminous SkyTile graphic

Housed in a white powder-coated, extruded (non-ferrous) aluminum frame

Moisture and chemical resistant

Each unit has a four knock-out junction box

Use in MRI, and other RF-free environments

### 2 Luminous SkyTile (lens):

Acrylic, Acrylite, or polycarbonate substrate

Lightweight & durable

High resolution reproduction from proprietary digital image file

Color-calibrated for daylight quality light source

Non-glare matte finish

Fade resistant pigmented inks containing UV inhibitors

### 3 Classic Elevator (frame):

Moisture resistant, light weight aluminum

1.25" (31.8mm) vertical profile

Quick and easy installation

Powder coated, white matte finish to match standard grid

Compatible with standard 15/16" or 24mm grid systems

Precision machined corners, seamless architectural appearance

### UL, CSA, and CE compliant:

ES24 Series when used with 24PS HLG Power System,

UL/CSA Listed or CE Compliant power supply

fully certified by Intertek Group plc

### Electrical:

24V DC, 1.53 Amps, 36.7 Watts per ES24 Series fixture

Sky Factory 24PS HLG dimmable power system

Converts 100-240V AC (277V AC North America only) to 24V DC

Size and quantity per installation calculated by Sky Factory

Power system aluminum enclosure

Mounted on baseplate with junction box on input and output ends

See 24PS HLG Power System Technical Specifications sheet

Sky Factory provided HLG dimmable power supply (International Only)

Converts 100-240V AC (277V AC North America only) to 24V DC

Client provided UL/CSA Listed or CE Compliant power supply

Must convert V AC to 24V DC

### Items not provided:

AC wiring between fuse/breaker panel and 24V DC power system

DC wiring between 24V DC power system and EcoSlim light box

Dimmer wiring between 24V DC power system and switch/dimmer control box

RFI/EMI filters for MRI installations

See Classic w/ EcoSlim Installation Instructions; and,

Classic w/ EcoSlim Electrical Packet (24PS HLG), Electrical Instructions (HLG) or

Electrical Instructions (Fixture Only)

### Ceiling Clearance Dimensions:

Minimum space required above ceiling grid ranges from 5.13" (13cm) – 9" (23cm)

depending on extent of fixture pre-assembly before installation in grid,

and access to adjacent grid sections

### Installation:

Elevators, tiles and luminaires easily installed into standard 15/16" or 24mm grid systems.

ES24 Series cannot be grouped with ES22 Series fixtures.

Classic EcoSlim SkyCeilings with perimeter can be recessed into a variety of hard ceilings.

### Factory Installed Options:

Seismic

### Configurations:

For sample configurations, go to [skyfactory.com](http://skyfactory.com)

### US Patent Information:

Our products, systems, and methods may be

protected by one or more of the following US Patents: Pat. 9,164,011, Pat. 8,851,700,


Pat. 7,959,316, and Pat. 7,481,550, as well as other patents pending.

## Classic ES24 Series

ES24-CLA, ES24M-CLA, ES24G-CLA

Ceiling Grid Mount

Back Illuminated Sky Image Ceiling

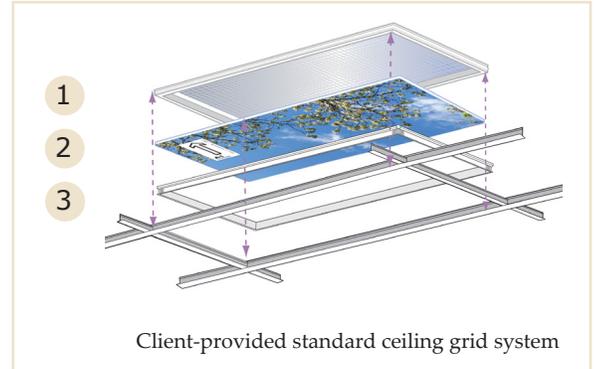


### Key Attributes:

15/16" (24mm) ceiling grid mount


Low profile – 5.13" (13cm) high

6500 Kelvin – cool daylight

Non-ferrous, RF-free construction

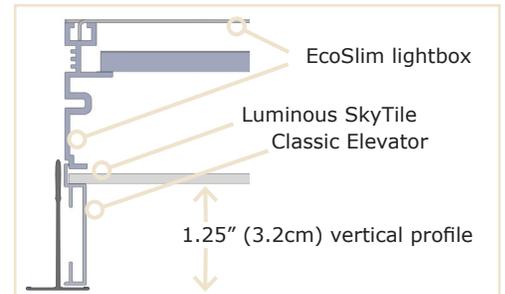

## Dimensions and Weight

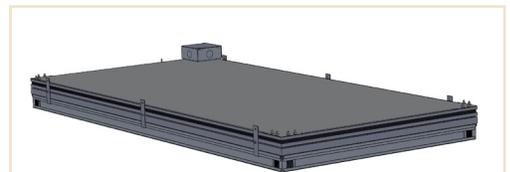

ES24-CLA: 23.75" L x 47.75" W x 5" D

27.5 lbs (12.48kg)

ES24M-CLA: 59.14cm L x 119.14cm W x 12.7cm D

27.0 lbs (12.25kg)

ES24G-CLA: 61.64cm L x 124.14cm W x 12.7cm D

28.5 lbs (12.93kg)